

ENDOR ECO


Recessed & Surface

MANUFACTURING IN THE UNITED KINGDOM

- Body constructed from painted aluminium
- High transmission microprism diffuser to aid in achieving UGR<19
- Tridonic LED modules and drivers
- Designed to suit 15mm & 25mm T-bar ceilings
- Surface mounted option
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- IK02 rated
- IP20 rated
- 5 year warranty on LED system

PRODUCT CODE

Product	ENDEC	Endor Eco
Mounting	RC	Recessed
	SF	Surface mount kit
Body Size	66	595mm X 595mm
	123	1195mm X 295mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	T	Touch Dimming Driver
Output (66)	02	2600 Lumens
	03	3400 Lumens
	04	3800 Lumens
Output (123)	02	2600 Lumens
	03	3400 Lumens
	04	3800 Lumens
Output TPA (66)	02	2200 Lumens
	03	2900 Lumens
	04	3300 Lumens
Colour Temperature	30	3000 Kelvin
	40	4000 Kelvin
Emergency	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
	LM	Lithium Emergency
Diffuser	MP	Microprism
	MPTPA	TPA Microprism
Body Colour	W	White

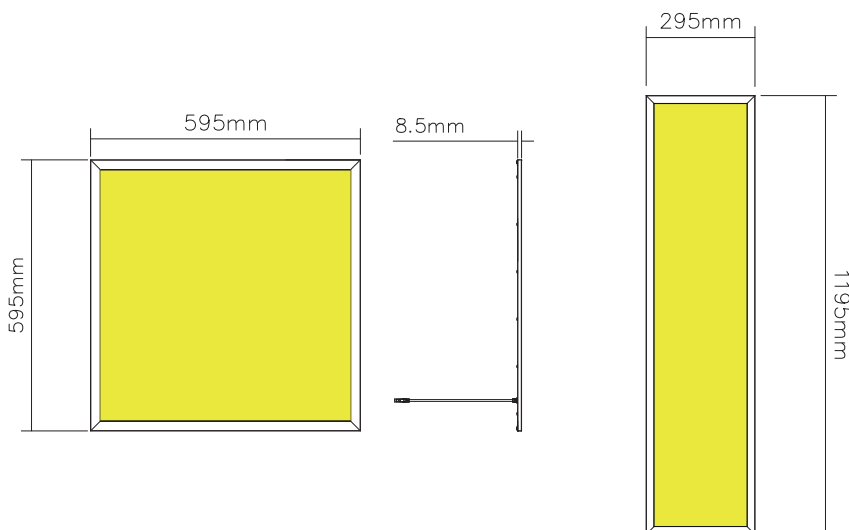

Ambient operating temperature 25°C - Do not cover back of fitting

