




HOTH Recessed

MANUFACTURING IN THE
UNITED KINGDOM

- Body constructed from powder coated steel
- High transmission opal diffuser
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Designed to suit 25mm T-bar ceilings
- Bespoke/project specific sizes, and outputs made to order
- Various powder coated finishes
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- IP20 rated
- 5 year warranty on LED system

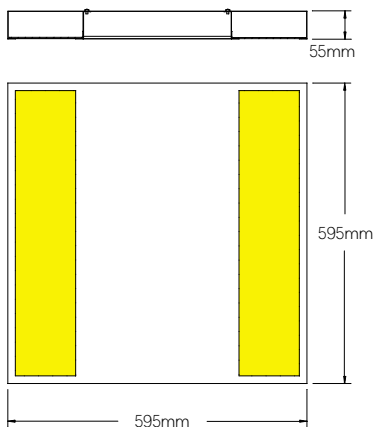

Ambient operating temperature 25°C - Do not cover back of fitting

PRODUCT CODE

Product	HO	Hoth
Body Size	66	595mm X 595mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
	T	Touch Dimming Driver
Output	03	3000 Lumens
	04	4000 Lumens
	05	5000 Lumens
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
Sensor	-	No sensor
	MS	Mini Sensor
Emergency	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
	LM	Lithium Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	O	Other/Specified