
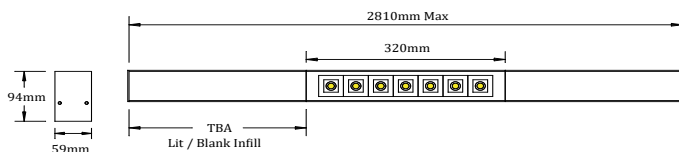


MERIDIAN POD Linear System


MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium housing
- 50 Degree lens & matt black shade to aid in achieving UGR<19
- Infill blanking panels available
- Lit section with opal or Microprism diffusers made to order
- Stand alone or continuous run lighting system
- Surface, suspended & recessed options
- Tridonic LED modules and drivers
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Bespoke/project specific sizes, shapes and outputs made to order
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

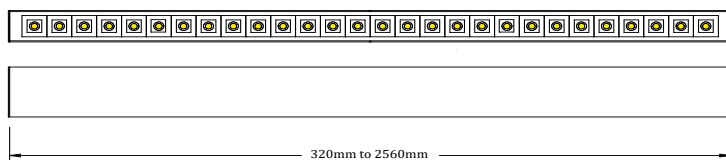

***Recessed Option
Measurements do not include trim - Add 30mm to the overall length of fitting (standalone and continuous run)

Ambient operating temperature 25°C



PRODUCT CODE

Product	MPD	Meridian Pod
Mounting	SP	Suspended
	SF	Surface
	RC	Recessed
Body Size	03	Length (320mm)
	06	Length (600mm)
	08	Length (880mm)
	11	Length (1160mm)
	14	Length (1440mm)
	17	Length (1720mm)
	20	Length (2000mm)
Configuration	22	Length (2280mm)
	25	Length (2560mm)
	P	Pod**
	PB	Pod** + Blank Infill*
	PM	Pod + Microprism**
Driver	PO	Pod + Opal **
	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output Per Pod	T	Touch Dimming Driver
	01	1000 Lumens
	015	1500 Lumens
Pod	02	2000 Lumens
	-	Pod Qty per length**
Lit Section	-	Lit section Qty & length**
Blank Section	-	Blank unlit section*
Colour Temperature	3	3000 Kelvin
	4	4000 Kelvin
Sensor	-	No Sensor
	PR	PIR Sensor
Emergency	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
	LM	Lithium Emergency
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified

*** Recessed Option with trim

** Lit Lengths & outputs to be advised

* Blank Infill lengths to be advised

