





MERIDIAN RC Recessed Linear System

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium housing
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Multiple coloured diffuser inserts available
- Infill blanking panels optional
- Stand alone or continuous run lighting system
- Bespoke/project specific sizes, shapes and outputs made to order
- Lit corner section made to order
- High colour consistency 3 step MacAdam
- Various powder coated finishes
- High colour rendering CRI>80
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

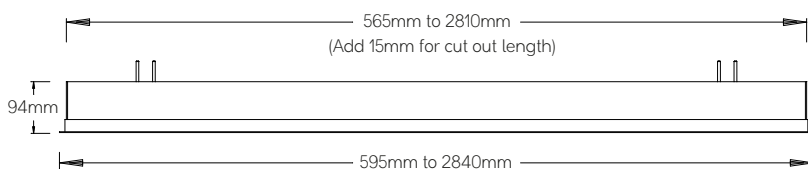

Ambient operating temperature 25°C



PRODUCT CODE	
Product	MRC Meridian Recessed
Body Size*	06 Length (565mm)
	08 Length (845mm)
	11 Length (1125mm)
	14 Length (1405mm)
	17 Length (1685mm)
	23 Length (2250mm)
	28 Length (2810mm)
Configuration	SA Stand Alone
	CC Continuous Centre
	CS Continuous Start
	CE Continuous End
Driver	S Standard Driver
	D Dali Driver
	W Wireless Dim
	A 1-10V Driver
	T Touch Dimming Driver
Output <small>(custom outputs available)</small>	02 2000 Lumens (565mm)
	03 3000 Lumens (845mm)
	04 4000 Lumens (1125mm)
	05 5000 Lumens (1405mm)
	06 6000 Lumens (1685mm)
	08 8000 Lumens (2250mm)
	10 10000 Lumens (2810mm)
Colour Temperature	3 3000 Kelvin
	4 4000 Kelvin
Sensor	- No Sensor
	PR PIR Sensor
Emergency	- No Emergency
	EL 3 Hour Emergency
	ST Self-Test 3 Hour Emergency
	ED 3 Hour Emergency DALI EM Pro
	LM Lithium Emergency
Diffuser	OP Opal
	MP Microprism
Body Colour	W White
	B Black
	S Silver
	G Gold
	O Other/Specified

*Measurements do not include trim - Add 30mm to the overall length of fitting (standalone and continuous run)







MERIDIAN RC HO Recessed Linear System

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium housing
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Multiple coloured diffuser inserts available
- Infill blanking panels optional
- Stand alone or continuous run lighting system
- Bespoke/project specific sizes, shapes and outputs made to order
- Lit corner section made to order
- High colour consistency 3 step MacAdam
- Various powder coated finishes
- High colour rendering CRI>80
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

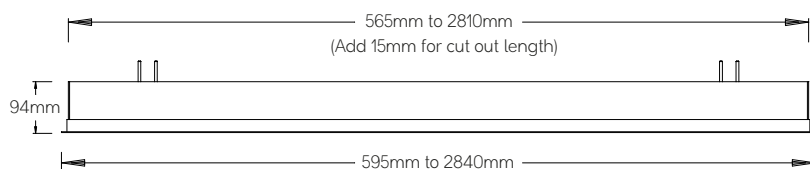

Ambient operating temperature 25°C



PRODUCT CODE	
Product	MRC Meridian Recessed Ho
Body Size*	06 Length (565mm)
	08 Length (845mm)
	11 Length (1125mm)
	14 Length (1405mm)
	17 Length (1685mm)
	23 Length (2250mm)
Configuration	28 Length (2810mm)
	SA Stand Alone
	CC Continuous Centre
	CS Continuous Start
Driver	CE Continuous End
	S Standard Driver
	D Dali Driver
	W Wireless Dim
	A 1-10V Driver
Output (custom outputs available)	T Touch Dimming Driver
	03 3000 Lumens (565mm)
	04 4500 Lumens (845mm)
	06 6100 Lumens (1125mm)
	07 7600 Lumens (1405mm)
	09 9100 Lumens (1685mm)
Colour Temperature	12 12200 Lumens (2250mm)
	15 15200 Lumens (2810mm)
Colour Temperature	3 3000 Kelvin
	4 4000 Kelvin
Sensor	- No Sensor
	PR PIR Sensor
Emergency	- No Emergency
	EL 3 Hour Emergency
	ST Self-Test 3 Hour Emergency
	ED 3 Hour Emergency DALI EM Pro
	LM Lithium Emergency
Diffuser	OP Opal
	MP Microprism
Body Colour	W White
	B Black
	S Silver
	G Gold
	O Other/Specified

*Measurements do not include trim - Add 30mm to the overall length of fitting (standalone and continuous run)






MERIDIAN RC LO


Recessed Linear System

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium housing
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Multiple coloured diffuser inserts available
- Infill blanking panels optional
- Stand alone or continuous run lighting system
- Bespoke/project specific sizes, shapes and outputs made to order
- Lit corner section made to order
- High colour consistency 3 step MacAdam
- Various powder coated finishes
- High colour rendering CRI>80
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

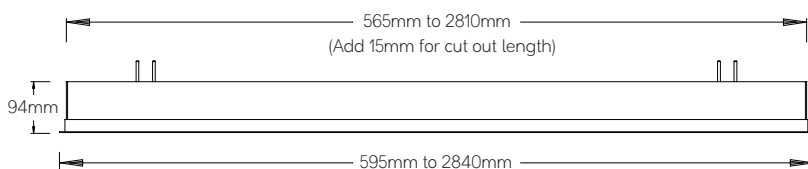

Ambient operating temperature 25°C



PRODUCT CODE	
Product	MRC Meridian Recessed Lo
Body Size*	06 Length (565mm)
	08 Length (845mm)
	11 Length (1125mm)
	14 Length (1405mm)
	17 Length (1685mm)
	23 Length (2250mm)
Configuration	28 Length (2810mm)
	SA Stand Alone
	CC Continuous Centre
	CS Continuous Start
Driver	CE Continuous End
	S Standard Driver
	D Dali Driver
	W Wireless Dim
	A 1-10V Driver
Output (custom outputs available)	T Touch Dimming Driver
	01 1000 Lumens (565mm)
	015 1600 Lumens (845mm)
	02 2100 Lumens (1125mm)
	025 2700 Lumens (1405mm)
	03 3200 Lumens (1685mm)
Colour Temperature	04 4300 Lumens (2250mm)
	05 5400 Lumens (2810mm)
Colour Temperature	3 3000 Kelvin
	4 4000 Kelvin
Sensor	- No Sensor
	PR PIR Sensor
Emergency	- No Emergency
	EL 3 Hour Emergency
	ST Self-Test 3 Hour Emergency
	ED 3 Hour Emergency DALI EM Pro
	LM Lithium Emergency
Diffuser	OP Opal
	MP Microprism
Body Colour	W White
	B Black
	S Silver
	G Gold
	O Other/Specified

*Measurements do not include trim - Add 30mm to the overall length of fitting (standalone and continuous run)

