


MERIDIAN SP Suspended Linear System

MANUFACTURING IN THE
UNITED KINGDOM



- Extruded aluminium housing
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Supplied with adjustable 3m drop wire suspension kit and flex
- Multiple coloured diffuser inserts available
- Infill blanking panels optional
- Stand alone or continuous run lighting system
- Downlight only or up/downlight
- Lit corner section made to order
- Bespoke/project specific sizes, shapes and outputs made to order
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

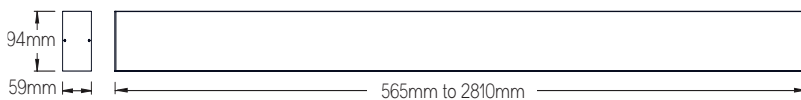

Ambient operating temperature 25°C




PRODUCT CODE			
Product	MSP	Meridian Suspended	
Distribution	D	Downlight Only	
	U	Uplight / Downlight	
Body Size	06	Length (565mm)	
	08	Length (845mm)	
	11	Length (1125mm)	
	14	Length (1405mm)	
	17	Length (1685mm)	
	23	Length (2250mm)	
Configuration	SA	Stand Alone	
	CC	Continuous Centre	
	CS	Continuous Start	
	CE	Continuous End	
Driver	S	Standard	
	D	Dali	
	W	Wireless Dim	
	A	1-10V	
Output (downlight only)	T	Touch Dimming Driver	
	02	2000 Lumens (565mm)	
	03	3000 Lumens (845mm)	
	04	4000 Lumens (1125mm)	
	05	5000 Lumens (1405mm)	
	06	6000 Lumens (1685mm)	
	08	8000 Lumens (2250mm)	
	10	10000 Lumens (2810mm)	
	Output (up/downlight)	03	3000 Lumens (565mm)
		05	5000 Lumens (845mm)
07		7000 Lumens (1125mm)	
09		9000 Lumens (1405mm)	
11		11000 Lumens (1685mm)	
14		14000 Lumens (2250mm)	
Colour Temperature	18	18000 Lumens (2810mm)	
	3	3000 Kelvin	
Sensor	4	4000 Kelvin	
	-	No Sensor	
Emergency	PR	PIR Sensor	
	-	No Emergency	
	EL	3 Hour Emergency	
	ST	Self-Test 3 Hour Emergency	
Diffuser	ED	3 Hour Emergency DALI EM Pro	
	LM	Lithium Emergency	
Body Colour	OP	Opal	
	MP	Microprism	
	W	White	
	B	Black	
	S	Silver	
	G	Gold	
	O	Other/Specified	

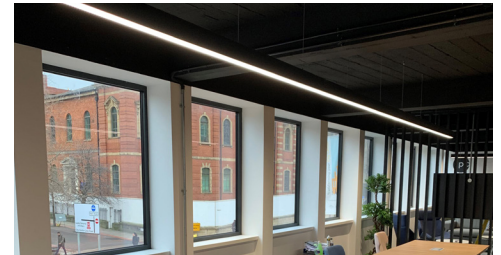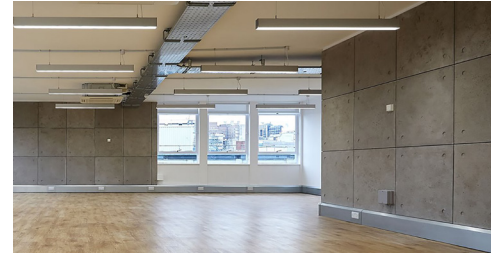

MERIDIAN SP HO Suspended Linear System

MANUFACTURING IN THE
UNITED KINGDOM


- Extruded aluminium housing
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Supplied with adjustable 3m drop wire suspension kit and flex
- Multiple coloured diffuser inserts available
- Infill blanking panels optional
- Stand alone or continuous run lighting system
- Downlight only or up/downlight
- Lit corner section made to order
- Bespoke/project specific sizes, shapes and outputs made to order
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

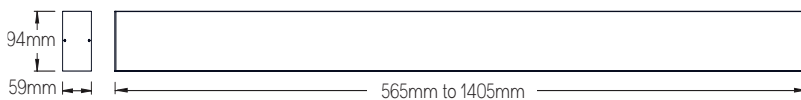

Ambient operating temperature 25°C

PRODUCT CODE			
Product	MSP	Meridian Suspended Ho	
Distribution	D	Downlight Only	
	U	Uplight / Downlight	
Body Size	06	Length (565mm)	
	08	Length (845mm)	
	11	Length (1125mm)	
	14	Length (1405mm)	
	17	Length (1685mm)	
	23	Length (2250mm)	
Configuration	SA	Stand Alone	
	CC	Continuous Centre	
	CS	Continuous Start	
	CE	Continuous End	
Driver	S	Standard	
	D	Dali	
	W	Wireless Dim	
	A	1-10V	
Output (downlight only)	T	Touch Dimming Driver	
	03	3000 Lumens (565mm)	
	04	4500 Lumens (845mm)	
	06	6100 Lumens (1125mm)	
	07	7600 Lumens (1405mm)	
	09	9100 Lumens (1685mm)	
	12	12200 Lumens (2250mm)	
	15	15200 Lumens (2810mm)	
	Output (up/downlight)	04	4500 Lumens (565mm)
		07	7600 Lumens (845mm)
10		10700 Lumens (1125mm)	
13		13700 Lumens (1405mm)	
16		16800 Lumens (1685mm)	
21		21400 Lumens (2250mm)	
Colour Temperature	27	27500 Lumens (2810mm)	
	3	3000 Kelvin	
Sensor	4	4000 Kelvin	
	-	No Sensor	
Emergency	PR	PIR Sensor	
	-	No Emergency	
	EL	3 Hour Emergency	
	ST	Self-Test 3 Hour Emergency	
	ED	3 Hour Emergency DALI EM Pro	
Diffuser	LM	Lithium Emergency	
	OP	Opal	
Body Colour	MP	Microprism	
	W	White	
	B	Black	
	S	Silver	
	G	Gold	
	O	Other/Specified	




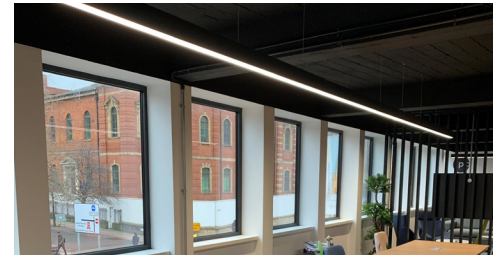

MERIDIAN SP LO Suspended Linear System

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium housing
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Supplied with adjustable 3m drop wire suspension kit and flex
- Multiple coloured diffuser inserts available
- Infill blanking panels optional
- Stand alone or continuous run lighting system
- Downlight only or up/downlight
- Lit corner section made to order
- Bespoke/project specific sizes, shapes and outputs made to order
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Various powder coated finishes
- IP20 rated
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- 5 year warranty on LED system

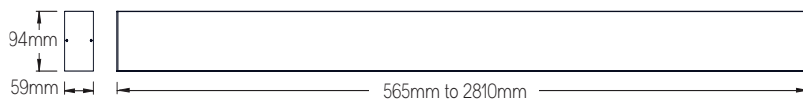

Ambient operating temperature 25°C

PRODUCT CODE		
Product	MSP	Meridian Suspended Lo
Distribution	D	Downlight Only
	U	Uplight / Downlight
Body Size	06	Length (565mm)
	08	Length (845mm)
	11	Length (1125mm)
	14	Length (1405mm)
	17	Length (1685mm)
	23	Length (2250mm)
Configuration	SA	Stand Alone
	CC	Continuous Centre
	CS	Continuous Start
	CE	Continuous End
Driver	S	Standard
	D	Dali
	W	Wireless Dim
	A	1-10V
Output (downlight only)	T	Touch Dimming Driver
	01	1000 Lumens (565mm)
	015	1600 Lumens (845mm)
	02	2100 Lumens (1125mm)
	025	2700 Lumens (1405mm)
	03	3200 Lumens (1685mm)
	04	4200 Lumens (2250mm)
	05	5400 Lumens (2810mm)
	Output (up/downlight)	01
02		2700 Lumens (845mm)
03		3700 Lumens (1125mm)
04		4800 Lumens (1405mm)
05		5900 Lumens (1685mm)
07		7400 Lumens (2250mm)
Colour Temperature	09	9600 Lumens (2810mm)
	3	3000 Kelvin
	4	4000 Kelvin
Sensor	-	No Sensor
	PR	PIR Sensor
Emergency	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	3 Hour Emergency DALI EM Pro
	LM	Lithium Emergency
Diffuser	OP	Opal
	MP	Microprism
Body Colour	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified

