





CONCEALED T

Recessed Concealed T

MANUFACTURING IN THE
UNITED KINGDOM

- Body constructed from powder coated steel
- High transmission opal diffuser
- Tridonic LED modules and drivers
- Suitable for most concealed T ceilings
- Adjustable pull up mounting brackets as standard,
- Manufactured brackets available for non standard installations
- Bespoke/project specific sizes and outputs made to order
- Various powder coated finishes
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- IP20 rated
- 5 year warranty on LED system

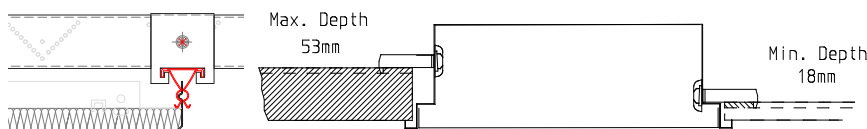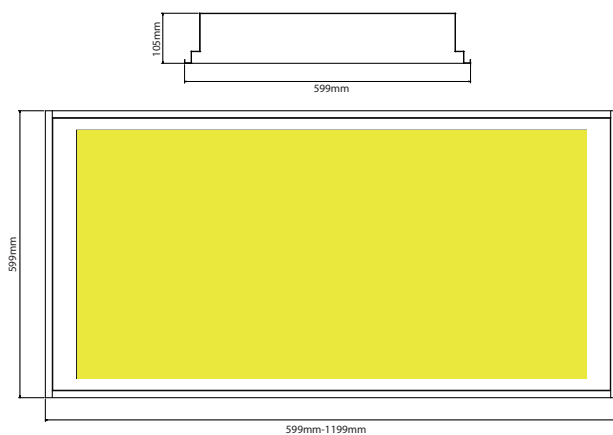

Using standard mounting brackets

| PRODUCT CODE | | | |
|---------------------------|---------------------|------------------------------|--------------|
| Product | CT | Concealed T | |
| Body Size | 66 | 599mm X 599mm | |
| | 126 | 1199mm X 599mm | |
| Driver | S | Standard Driver | |
| | D | Dali Driver | |
| | W | Wireless Dim | |
| | A | 1-10V Driver | |
| Output (66) | T | Touch Dimming Driver | |
| | 05 | 5000 Lumens | |
| | 06 | 6000 Lumens | |
| | 07 | 7000 Lumens | |
| | 08 | 8000 Lumens | |
| | 09 | 9000 Lumens | |
| | Output (126) | 10 | 10000 Lumens |
| | | 12 | 12000 Lumens |
| | | 14 | 14000 Lumens |
| | | 16 | 16000 Lumens |
| Colour Temperature | 18 | 18000 Lumens | |
| | 20 | 20000 Lumens | |
| Colour Temperature | 3 | 3000 Kelvin | |
| | 4 | 4000 Kelvin | |
| Sensor | - | No Sensor | |
| | PR | Pir Sensor | |
| Emergency* | MW | Microwave Sensor | |
| | - | No Emergency | |
| Diffuser | EL | 3 Hour Emergency Pack | |
| | ST | Self-Test 3 Hour Emergency | |
| | ED | 3 Hour Emergency Dali EM Pro | |
| | LM | Lithium Emergency | |
| Body Colour | OP | Opal | |
| | MP | Microprism | |
| Body Colour | W | White | |
| | O | Other/Specified | |

* Remote emergency on 66 body size



Ambient operating temperature 25°C - Do not cover back of fitting