


UNIVERSAL IP Moisture Resistant Recessed

MANUFACTURING IN THE
UNITED KINGDOM

- Body constructed from powder coated steel
- High transmission opal diffuser
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Suitable for 15mm/25mm T & plasterboard ceiling types as standard
- Concealed T ceiling option available
- Clean room option available
- Bespoke/project specific sizes and outputs made to order
- Available with tamper proof screws
- Various powder coated finishes
- Wireless option available
- Optional LiFePO4 Lithium Battery for extended life
- An ingress protection of up to IP65 from below the ceiling
- 5 year warranty on LED system

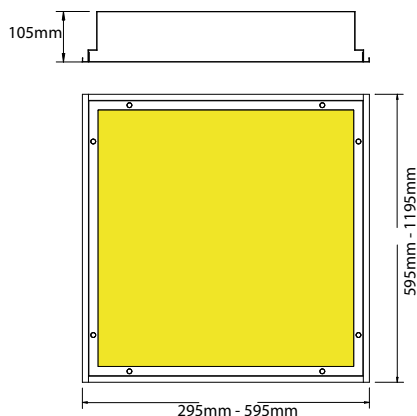

PRODUCT CODE		
Product	UMIP	Universal IP
Body Size	66	595mm X 595mm
	123	1195mm X 295mm
	126	1195mm X 595mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output (66) Output (123)	T	Touch Dimming Driver
	03	3000 Lumens
	04	4000 Lumens
	05	5000 Lumens
Output (126)	06	6000 Lumens
	06	6000 Lumens
	08	8000 Lumens
Colour Temperature	10	10000 Lumens
	12	12000 Lumens
	3	3000 Kelvin
Sensor	4	4000 Kelvin
	-	No Sensor
Emergency	MW	Microwave Sensor
	-	No Emergency
	EL	3 Hour Emergency Pack
	ST	Self-Test 3 Hour Emergency
Diffuser	ED	3 Hour Emergency Dali EM Pro
	LM	Lithium Emergency
	OP	Opal
Body Colour	MP	Microprism
	W	White
	B	Black
	S	Silver
	O	Other/Specified

Ambient operating temperature 25°C - Do not cover back of fitting

