





CONCEALED T

Recessed Concealed T

MANUFACTURING IN THE
UNITED KINGDOM

- Body constructed from powder coated steel
- High transmission opal diffuser
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic LED modules and drivers
- Suitable for most concealed T ceilings
- Adjustable pull up mounting brackets as standard
- Manufactured brackets available for non standard installations
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Bespoke sizes and outputs made to order
- Various powder coated finishes
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- IP20 rated
- 5 year warranty on LED system

PRODUCT CODE		
Product	CT	Concealed T
Body Size	66	599mm X 599mm
	126	1199mm X 599mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output (66)	T	Touch Dimming Driver
	04	3900 Lumens
	05	5000 Lumens
	06	6000 Lumens
Output (126)	07	7000 Lumens
	08	7900 Lumens
	10	10100 Lumens
	12	12100 Lumens
Colour Temperature	14	14100 Lumens
	3	3000 Kelvin
Sensor	4	4000 Kelvin
	-	No Sensor
Emergency Lithium LiFePO4	PR	Pir Sensor
	MW	Microwave Sensor
	-	No Emergency
Diffuser	EL	3 Hour Emergency
	MP	Microprism
	ST	Self-Test 3 Hour Emergency
Body Colour	ED	DALI EM Pro 3 Hour Emergency
	OP	Opal
	MP	Microprism
	W	White
	B	Black
	O	Other/Specified

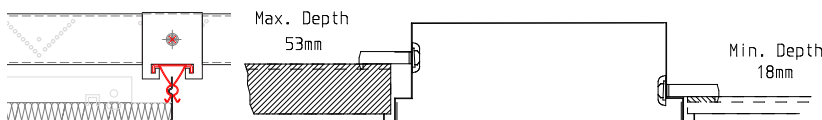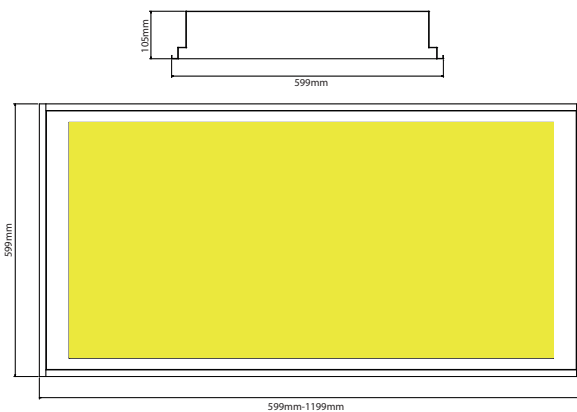

Using standard mounting brackets

* Remote emergency on 66 body size



Ambient operating temperature 25°C - Do not cover back of fitting