


TETRA Pendant

MANUFACTURING IN THE
UNITED KINGDOM

- Extruded aluminium single piece housing (meaning no on-site assembly)
- Snap in/out opal diffuser for general illumination
- Microprism diffuser available to aid in achieving UGR<19
- Tridonic or Philips LED modules and drivers
- Downlight only or up/downlight
- Bespoke/project specific sizes, shapes and outputs made to order
- Supplied with adjustable 3m drop wire suspension kit and pre-wired with 3m flex
- High colour consistency 3 step MacAdam
- High colour rendering CRI>80
- Multiple coloured diffuser inserts available
- Various powder coated finishes
- IP20 rated
- Wireless option available
- LiFePO4 Lithium Battery for extended emergency life
- 5 year warranty on LED system

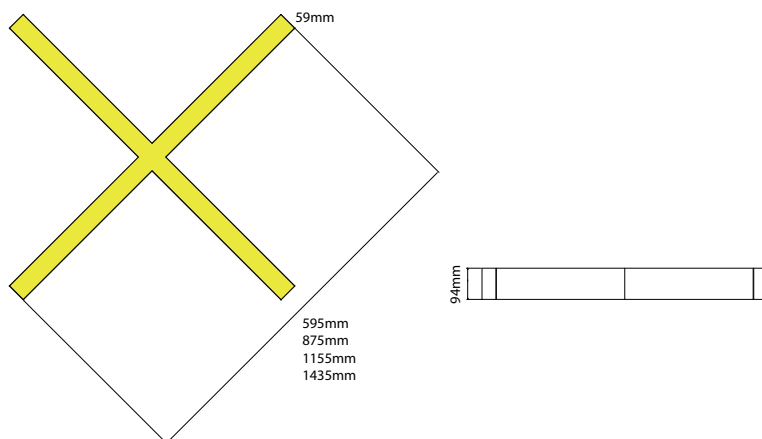

Ambient operating temperature 25°C

PRODUCT CODE

Product	TET	TET Pendant
Body Size	06	595mm
	09	875mm
	12	1155mm
	15	1435mm
Driver	S	Standard Driver
	D	Dali Driver
	W	Wireless Dim
	A	1-10V Driver
Output	04	4200 Lumens
	06	6200 Lumens
	08	8400 Lumens
	12	12500 Lumens
Output (595mm)	06	6300 Lumens
	09	9300 Lumens
Output (875mm)	08	8400 Lumens
	12	12500 Lumens
Output (1155mm)	10	10500 Lumens
	15	15600 Lumens
Output (1435mm)	3	3000 Kelvin
	4	4000 Kelvin
Colour Temperature	S	80
	N	90
CRI	-	No Emergency
	EL	3 Hour Emergency
	ST	Self-Test 3 Hour Emergency
	ED	DALI EM Pro 3 Hour Emergency
Emergency Lithium LiFePO4	OP	Opal
	MP	Microprism
Diffuser	W	White
	B	Black
	S	Silver
	G	Gold
	O	Other/Specified
Body Colour	W	White PVC
	B	Black PVC
	G	Grey PVC
	T	Transparent

